

## A Study on Correlation between Safety Factor of Pile-Slope Systems and Seismically Induced Displacements of Pile Groups

H. Hajimollaali<sup>1)</sup>, H. Elahi<sup>2)</sup> and M.Sabermahani<sup>3)</sup>

<sup>1),2)</sup> School of Civil Engineering, University of Science and Culture, Tehran, Iran.

<sup>3)</sup> School of Civil Engineering, University of Science and Technology, Tehran, Iran.

### ABSTRACT

This paper presents a study on the seismic behavior of pile groups located in soil slopes that are also known as pile-slope systems. The main objective of the present study is to explore a reasonable and practical correlation between the safety factor of soil slope and seismic lateral displacements of pile groups in slope, in order to achieve a better understanding and a framework for seismic analysis and design of pile groups in soil slope. To this end, a parametric study based on 3D numerical analysis for a number of pile groups in soil slopes under different conditions has been carried out to investigate the seismic behavior of pile-slope systems. Some findings and conclusions are drawn that are intended to provide insight into the seismic behavior of pile-slope systems.

**KEYWORDS:** Pile group, Soil slope, Pile-slope system, Seismic behavior, Pseudo-static safety factor.

### INTRODUCTION

Many coastal and harbor structures, bridges, high-rise buildings and transmission towers are constructed on soil slopes and are supported by pile groups. These structures may be subjected to induced lateral loads due to the seismic movements of slope. In such conditions, the existing analysis and design methods are mostly complex and time consuming and cannot be applied in analysis and design procedures consistently. Moreover, although some analytical, numerical and experimental methods have been applied to study the seismic behavior of pile groups, little research has been conducted to investigate the seismic behavior of pile groups located in soil slopes, other than for the cases where the slope angle does not exceed 2° (Padron et al., 2008; Wilson, 1998).

Consequently, a lot of complexities and unknowns have remained in this area.

The positioning of a pile within a soil slope has been considered in terms of the stabilization of unstable slopes in the absence of seismic activity (Hayward, 2000). Since the approach in these studies has focused primarily on the increase in safety factor of the slope through the performance of piles, the effect of piles has often not been considered. A number of studies may be found in the literature regarding the effects of inclined geometry of the ground on the lateral behavior of piles under static loading (Chen and Poulos, 2001; Mezazigh and Levacher, 1998). These studies have usually examined the effect of ground inclination on the lateral bearing capacity of piles. Also, numerous studies have been reported on the subject of seismic behavior of soil slopes (Rathje and Bray, 2000; Wartman et al., 2005). Such analytical and/or experimental studies have focused on both the

stability and the seismic deformations of slopes, and most involve the use of Newmark's sliding block theory (Newmark, 1965). Pseudo-static approaches for the seismic analysis of pile foundations are attractive for practicing engineers, because they are simple when compared to difficult and more complex dynamic analyses.

In the past years, several simplified approaches for analysis of single piles or pile groups have been developed that can be used with little computational effort (Abghari and Chai, 1995; Lyanapathirana and Poulos, 2005).

While a number of simplified methods for seismic evaluation and design of pile foundations are available, there are few simple methods to consider the response of pile-slope systems.

Thus, in this study, basic principles for achieving an engineering and simplified framework of seismic analysis and design of pile groups in soil slope leading to a better understanding of the seismic behavior of pile-slope systems are established. In this regard, it is attempted to answer the following question: Is there any reasonable and practical correlation between the stability safety factor of a soil slope and seismic displacements of pile group located in it?

The main objective of this study is to answer the above mentioned question and if it is concluded that there exists a reasonable correlation, a simplified approach based on simple computational concepts and methods can be developed to evaluate the seismic displacements of pile groups located in soil slope.

## NUMERICAL SIMULATION

The program used in this paper is finite difference program FLAC<sup>3D</sup> version 3.1 (FLAC, 1995). The calculation is based on the explicit finite difference scheme to solve the full equations of motion, using lumped grid point masses derived from the real density of surrounding zones rather than fictitious masses used for optimum convergence in the static solution scheme. Therefore, the response of slope-pile systems is

analyzed by using a three-dimensional explicit-finite difference approach.

The Mohr-Coulomb model was used to simulate the non-linear soil behavior. This model was selected from among the soil models in the library of FLAC<sup>3D</sup>. The Mohr-Coulomb material model requires conventional soil parameters including unit weight ( $\gamma$ ), friction angle ( $\Phi$ ), cohesion intercept ( $c$ ), shear modulus ( $G$ ) and bulk modulus ( $B$ ). Table 1 presents the soil parameters used in the FLAC model.

Factors of safety are computed using FLAC<sup>3D</sup> by means of strength reduction approach. FLAC has several options for the modeling of structural elements, including beam and pile elements, both of which were utilized for this study. It should be mentioned that in this study, the pile heads are fixed (restrained). Restrained head condition is obtained by connecting the pile heads with beam elements. The structural elements are assumed to remain elastic at all times.

Beam and pile elements are identical, except that pile elements include an interface element to model soil-structure interaction (SSI). The interface element utilizes springs to model both the shear and normal SSI behavior. The procedures used to estimate the normal spring stiffness and a validation study are outlined in the following sections.

For a dynamic analysis, FLAC<sup>3D</sup> program provides several mechanical damping in which local damping is a simple and pragmatic method. The local damping coefficient  $\alpha_L$  is defined as:

$$\alpha_L = \pi D$$

where  $D$  is fraction of critical damping. Although the actual value given to the local damping has a profound influence on the dynamic wave transmission, if it is chosen from a certain range, it has little influence on the predicted factor of safety in seismic slope stability analysis. Hence, local damping of 0.157 (i.e., fraction of critical damping is 5% which is a typical value for geologic materials) is used in the model.

The input earthquake motions were recorded accelerograms, and were applied at the base of each

model as horizontal acceleration time histories.

For the static solutions, the bottom boundary was fixed in the horizontal and vertical directions and the lateral boundaries were fixed in the horizontal direction. For the dynamic solutions, the lateral boundaries utilized the free-field option in FLAC that approximated a free-field condition.

**Model Mesh and Boundary Conditions**

The soil was modeled with continuum zones, and

the structure was modeled using structural elements, as mentioned before. The mesh size and the maximum unbalanced force at the grid points (i.e., error tolerance) were selected on the basis of a series of parametric analyses to concurrently optimize accuracy and computation speed. The element sizes varied from 1m in each dimension around the structure to about 2 m far from the structure. Figure 1 shows the finite difference grid used in the FLAC model for the soil-structure system.

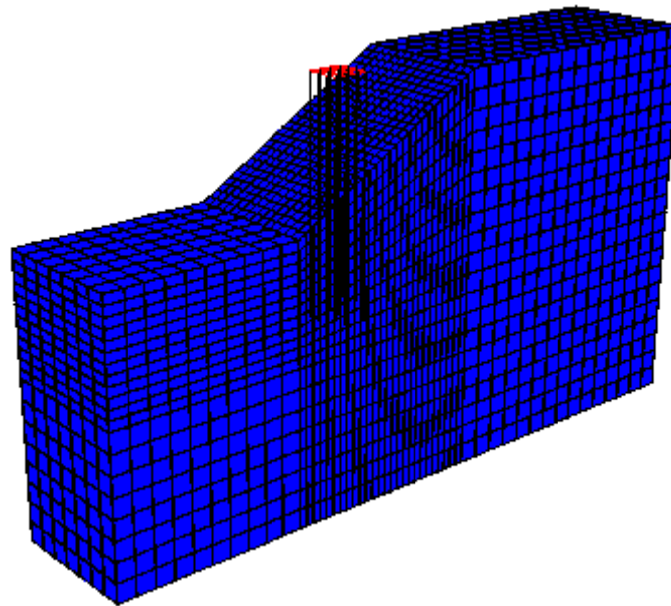


Figure (1): Model slope and finite difference mesh


Table 1. Parameters and variables selected for parametric study

Group Configuration	s/d	Soil Properties
1x2 - 1x4 - 1x6	3	$\Phi=20, C^o=10\text{KPa}, E=20\text{MPa}$
2x1 - 4x1 - 6x1	6	$\Phi=30, C^o=20\text{KPa}, E=50\text{MPa}$
2x2 - 4x4 - 6x6	10	$\Phi=40, C^o=40\text{KPa}, E=80\text{MPa}$

**Note:** it should be noted that only two ratios for s/d have been utilized in the study, and in this respect, no number has been considered for the third row of s/d column. Additionally, cohesion and friction angle and elastic modulus of soil are abbreviated to C,  $\Phi$  and E, respectively.

**PARAMETRIC STUDY**

In the current study, the procedure adopted for numerical analyses consists of two main steps: the first step is to calculate safety factors of soil slope, and the second is to calculate dynamic displacements of the pile groups. Hence, a parametric study was performed on hypothetical and comparable examples to derive practical and representative results. As shown in Figure 2 and Table 1, this study examines the effects of major factors and parameters on the response of pile-slope systems, such as configuration and number of piles in the group, soil profile (loose, medium and stiff categorized in terms of strength and stiffness) and pile spacing that is represented by the term  $s/d$  which is the ratio of spacing to diameter.

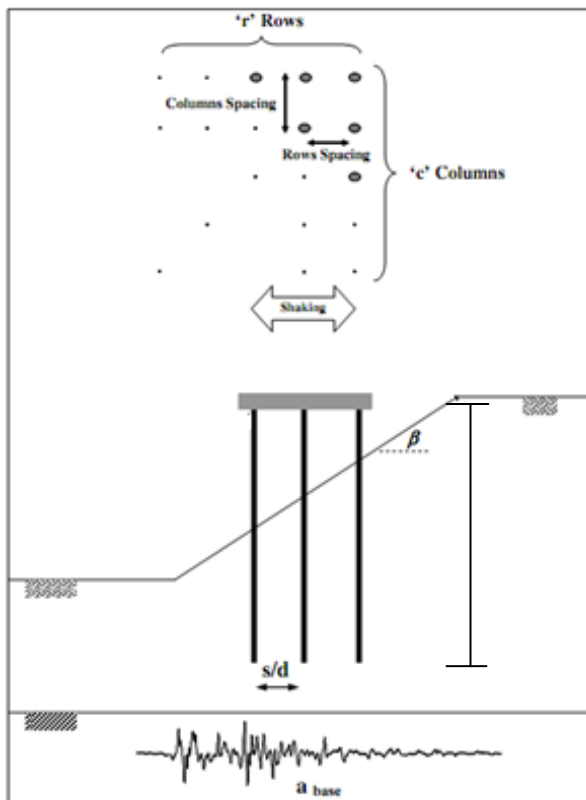

**Figure (2): Parameters used in the parametric study**

The properties of piles and soil slope used in the analyses are presented in Table 2.

**Table 2. Properties of piles and slope for parametric analysis**

Case	Parameter	Value	Unit
Pile	$E_p$	2.00E+5	MPa
	$L_p$	24	m
	$\nu$	0.3	-
	$\rho$	7850	kg/m <sup>3</sup>
	$t_p$	1	cm
	$d_p$	40	cm
Soil	$I_p$	2.33E-04	m <sup>4</sup>
	angle ( $\beta$ )	30°	-
	H (height of slope)	12	m

Regarding the stability and dynamic analyses, the following points should be noted:

- Owing to the main purpose of this study, which is investigation of seismic performance of the pile-slope system, seismic stability should be considered. In order to account for the seismic effects on slope stability, pseudostatic approach is applied. It should be mentioned that only the horizontal component of earthquake shaking is considered and the vertical component is ignored because the effects of vertical forces tend to average out to near zero. Regarding selection of pseudostatic coefficient, it should be said that as this coefficient is a function of maximum horizontal ground acceleration, only some fraction of peak acceleration should be selected for the coefficients. According to the studies carried out before, there are no certain rules for the selection of a pseudostatic coefficient for design, but based on the recommendations cited in the literature, the most acceptable and commonly used value is one-half of the peak ground acceleration which is also used in this study (Hynes-Griffin and Franklin, 1984).
- In order to study the effects of change in frequency content of the input motion on the response of pile-slope system, two earthquake accelerograms scaled to 0.25g with different predominant periods are selected. One of these accelerograms is the horizontal component of the North Palm Spring

earthquake which has got a long predominant period (1.78s) and the other one is related to the Northridge earthquake with short predominant

period (0.24s). Figure 3 shows the time-history and response acceleration spectrum of the mentioned motions.

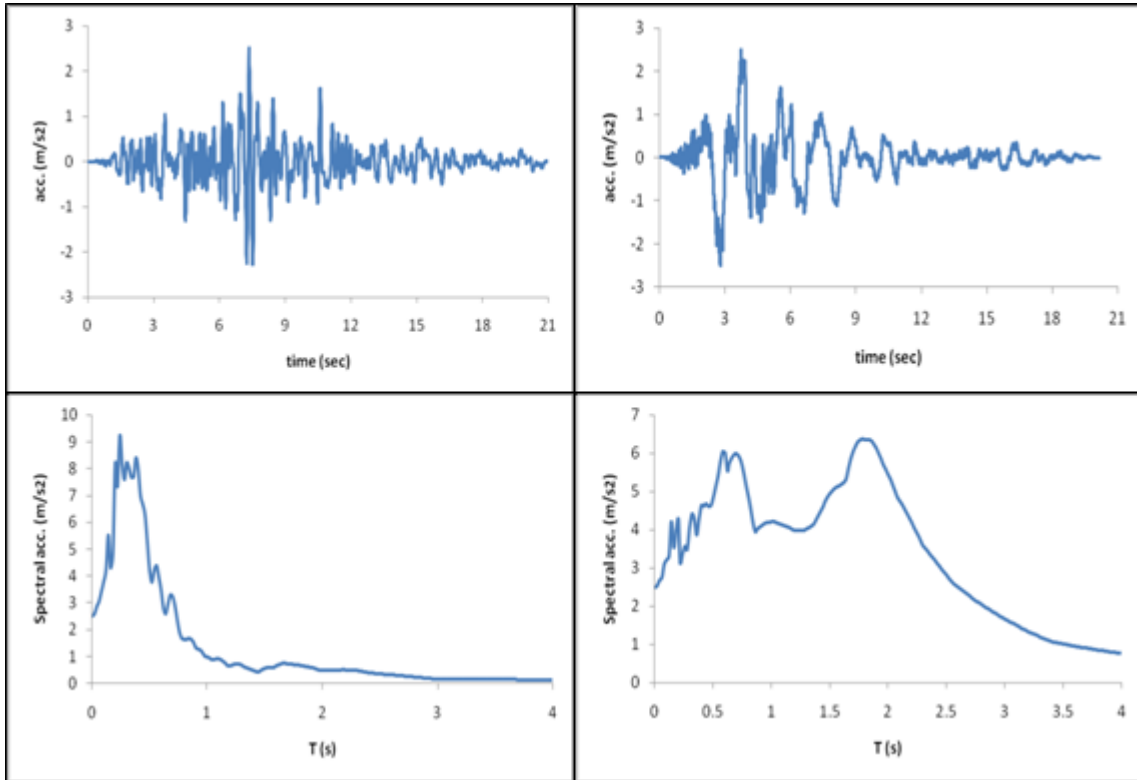


Figure (3): Time-history and acceleration response spectrum of (a) Northridge (b) North Palm Spring

3. Due to the complexities of the effect of cap mass on group response, the effect of cap mass is ignored in the parametric study.
4. Concerning each one of the variable parameters, a value as the core is chosen that is shown in Bold-Italic in the above Tables. The analyses performed with the core values provide core analyses that are considered as the basis for the comparison of each variable parameter.

### DIMENSIONAL ANALYSIS

In this section, it is attempted to perform a

dimensionless analysis on the results obtained in the previous section (i.e., pseudostatic safety factors and seismic pile group displacements), with the aim to find the most influencing and representative dimensionless parameters and produce dimensionless charts in order to study the correlation between the mentioned safety factors and displacements. To perform dimensional analysis, the terms involved in the mechanical properties of soil, pile and slope are combined to form independent dimensionless variable parameters. The variable parameters used in this study and their descriptions are presented in Tables 3 and 4, respectively.

**Table 3. Dimensionless parameters used in dimensional analysis**

Dimensionless Parameters	
$\Phi_1$	$\frac{E_p I_p}{E_s H_s^4}$
$\Phi_2$	$\frac{\tan \varphi}{\tan \beta}$
$\Phi_3$	$\frac{C}{\gamma_s H_s}$
$\Phi_4$	$\frac{S}{d}$
$\Phi_5$	$\frac{\delta}{d}$

In the next step, different combinations of dimensionless parameters are formed and then, related charts are drawn and dimensional analysis through a

trial and error process is performed. Combined dimensionless parameters are shown in Table 5.

**Table 4. Description of dimensionless parameters used in dimensional analysis**

Parameter	Dimension	Description
$E_p$	$\frac{N}{m^2}$	Pile Elastic Modulus
$I_p$	$m^4$	Moment of Inertia
$E_s$	$\frac{N}{m^2}$	Soil Elastic Modulus
$H_s^4$	$m^4$	Slope Height
$\tan \varphi$	-	Friction Angle of Soil
$\tan \beta$	-	Slope Inclination Angle
$C$	$\frac{N}{m^2}$	Soil Cohesion
$\gamma_s$	$\frac{N}{m^3}$	Soil Specific Weight
$S$	m	Pile Spacing
$\delta$	m	Maximum Displacement of Pile Group
$d$	m	Pile Diameter

**Table 5. Combined Dimensionless Parameters**


Combined Dimensionless Parameters Including Displacement and Safety Factor Used in the Analysis	
Parameters Including Safety Factor (FS)	Parameters Including Displacement ( $\delta$ )
$FS \cdot \frac{C}{\gamma_s H_s}$	$\frac{\delta}{d} \cdot \frac{E_p I_p}{E_s H_s^4} \cdot \frac{\delta}{d} \cdot \frac{E_s H_s^4}{E_p I_p}$
$FS \cdot \frac{\tan \varphi}{\tan \beta}$	$\frac{\delta}{d} \cdot \frac{\tan \varphi}{\tan \beta}$

$FS \cdot \frac{C}{\gamma_s H_s} / \frac{S}{d}$	$\frac{\delta \cdot C}{d \cdot \gamma_s H_s}$
$FS / \frac{S}{d}$	$\frac{\delta \cdot \tan \varphi \cdot E_p I_p}{d \cdot \tan \beta \cdot E_s H_s^4}$
FS	$\frac{\delta \cdot \tan \varphi / \tan \beta \cdot E_s H_s^4}{d \cdot C / \gamma_s H_s \cdot E_p I_p}$
-	$\frac{\delta \cdot \tan \varphi \cdot E_s H_s^4}{d \cdot \tan \beta \cdot E_p I_p}$
-	$\frac{\delta \cdot \tan \varphi \cdot E_s H_s^4 \cdot S}{d \cdot \tan \beta \cdot E_p I_p} / \frac{S}{d}$

**DIMENSIONLESS CHARTS**

After determining different combinations of dimensionless parameters, the primary dimensionless parameter representing the relation between pseudostatic safety factor and maximum seismic displacements of pile group is attempted to be found. For this reason, the dimensionless parameters were drawn *versus* each other in various charts, and after comparing and investigating the charts, it was observed that in many cases either there is no adequate

correlation between the selected parameters or these parameters do not demonstrate meaningful behavioral difference. Eventually, the parameter  $\Psi = \frac{\delta \cdot \tan \varphi \cdot E_s H_s^4}{d \cdot \tan \beta \cdot E_p I_p} / \frac{S}{d}$  was found the most appropriate and versatile one involving all of the natural and geometrical properties of the pile-slope system and selected as the primary dimensionless parameter. Dimensionless charts illustrating the correlation under this parameter are shown in Figure 4.

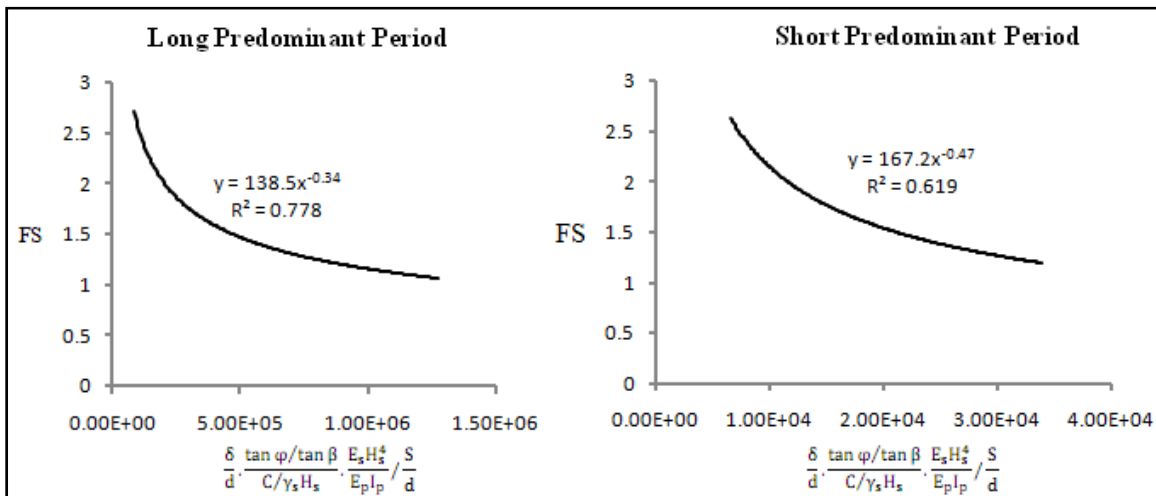

**Figure (4): Correlation between safety factor and seismic displacement of pile group under the primary dimensionless parameter**


According to this Figure, a good and acceptable correlation between pseudostatic safety factor and the displacement under the primary dimensionless

parameter is found. As seen in this Figure, a reasonable and correct behavior of the system is illustrated under the primary dimensionless parameter

which includes all of the factors and parameters involved in the problem. To further elucidate, it should be said that if this parameter is kept constant, decrease in stiffness and strength of the system, on the one hand decreases the safety factor and on the other leads to increase the displacements. In other words, safety factor and displacement that are two behavioral parameters, are correlated to each other by the obtained dimensionless parameter which is a natural-geometrical parameter.

**Results Obtained from the Effects of the Primary Dimensionless Parameter and their Interpretation**

According to Figures 5 and 6, as the safety factor of the slope decreases, the pile group displacements increase, and this result can be interpreted through two geotechnical and seismic viewpoints. Regarding the geotechnical viewpoint, as seen in Figure 5, while the dimensionless parameter is kept constant, a decrease in the safety factor results in the increase in induced pile group displacements.

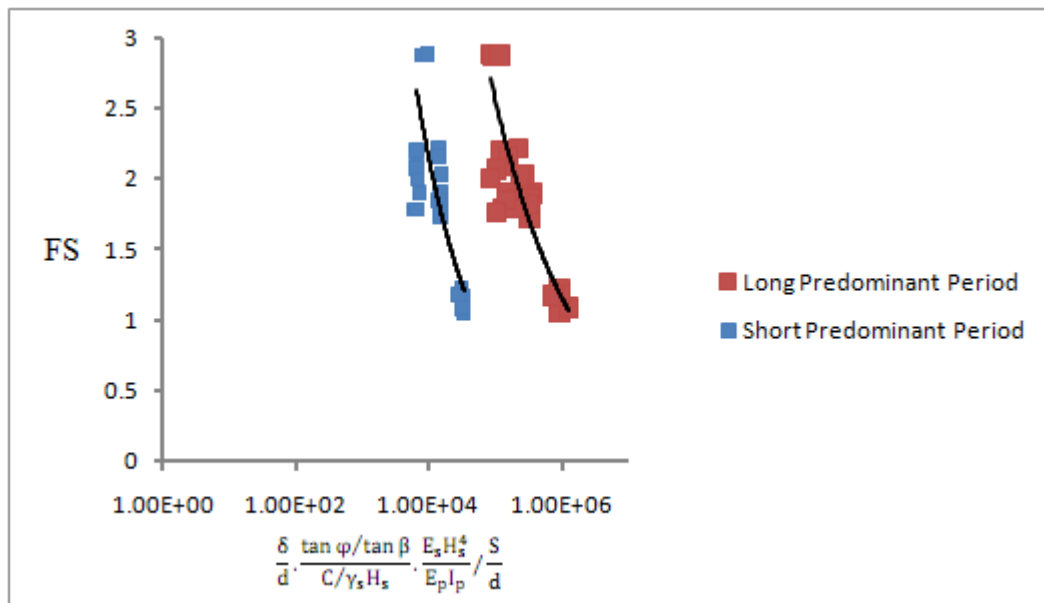

**Figure (5): Pile group displacements increase as a result of decrease in safety factor (geotechnical viewpoint)**

Figure 6 also illustrates that the rates of increase in displacements induced by the short and long predominant periods are different. As shown in this Figure, following the decrease in the safety factor of the system, when the predominant period of input motion is long, pile groups have experienced much greater displacements compared to the short predominant period input motion. This finding is interpreted through a seismic viewpoint, and it should be said that as the safety factor decreases, the natural frequency of the system also decreases and due to the

proximity of this frequency to the frequency of input motion, amplification phenomenon occurs; whereas, in case of short predominant input motion, the frequency of the motion is long and this difference between the period of input motion and the natural period of the system, rate of increase in displacements is insignificant. Thus, the difference in the increase in the amount of displacements is attributed to the amplification phenomenon.

In general, the above mentioned results are summarized in Figure 7. According to this Figure,



decrease in stiffness and strength of the system and/or generally, weakening the system decreases the safety factors, and on the other hand as the predominant

period of input motion increases, displacements become more sensitive to the increase.

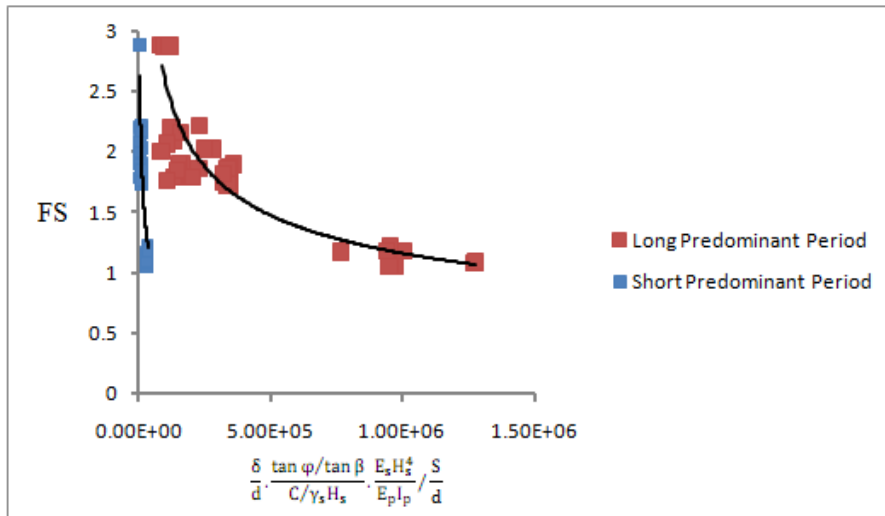


Figure (6): Significant difference in the rate of displacement increase due to amplification (seismic viewpoint)

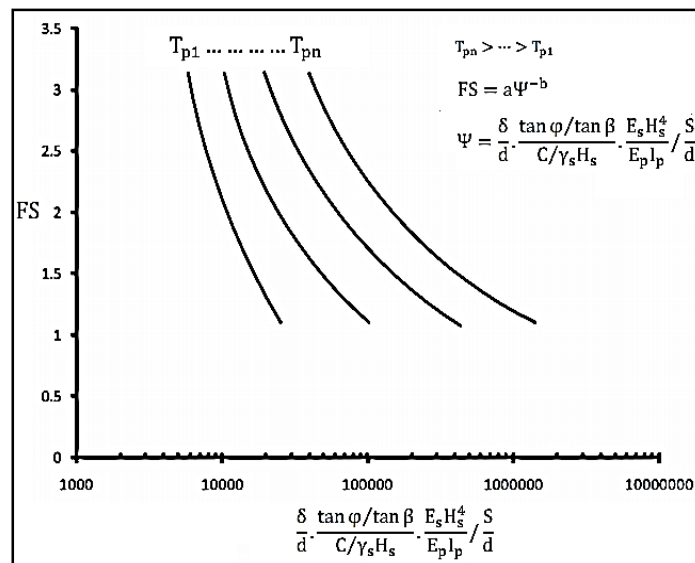


Figure (7): Response of pile-slope system to the change in predominant period of input motion

CONCLUSIONS

With regard to the results obtained from the

analyses, the major conclusions drawn from this study are as follows:

1. The correlation between two behavioral parameters;

safety factor and displacement through a dimensionless parameter including all of the natural and geometrical parameters of pile-slope system was obtained.

2. Decrease in strength and stiffness of soil decreases safety factor of the system and as a result of this decrease, pile group displacements increase. In

addition, as the soil stiffness decreases, its natural frequency decreases as well. Thus, if predominant frequency of input motion is short, the natural frequency of the system becomes proximate to the frequency of input motion leading to greater displacement increase compared to the case when the predominant frequency of input motion is long.

## REFERENCES

- Abghari, A., and Chai, J. (1995). "Modeling of soil-pile superstructure interaction for bridge foundations." *Performance of Deep Foundations under Seismic Loading*, J. P. Turner, ed., ASCE, N.Y., 45-59.
- Chen L.T., and Poulos H.G. (2001). "Approximation of lateral soil movements for analyzing lateral pile response". In: *Annual Conference of the Hong Kong Institution of Engineers*.
- FLAC. (1995). "Fast Lagrangian analysis of continua". Version 3.3, Itasca Consulting Group.
- Hayward, T., Lees, A.S., Powrie, W., Richards, D.J., and Smethurst, J. (2000). "Centrifuge modeling of a cutting slope stabilized by discrete piles". 105 Technical Report, Transport Research Library, Crothorne, UK, 32p.
- Hynes-Griffin, M.E., and Franklin, A.G. (1984). "Rationalizing the seismic coefficient method". U.S. Army Corps of Engineers Waterways Experiment Station. Miscellaneous Paper GI-84-13, 37 pp.
- Liyanaathirana, D.S., and Poulos, H.G. (2005). "Pseudostatic approach for seismic analysis of piles in liquefying soil." *J. Geotech. Geoenviron. Eng.*, 131 (12), 1480-1487.
- Mezazigh, S., and Levacher, D. (1998). "Laterally loaded piles in sand: slope effect on p-y reaction curves." *Can. Geotech. J.*, 35, 433-441.
- Newmark, N.M. (1965). "Effects of earthquakes on dams and embankments". *Geotechnique*, 15 (2), 139-159.
- Padron, L.A., Aznarez, J.J., and Maeso, O. (2008). "Dynamic analysis of piled foundations in stratified soils by a BEM-FEM model". *Soil Dyn. Earthq. Eng.*, 28 (5), 333-346.
- Rathje, E.M., and Bray, J.D. (2000). "Nonlinear coupled seismic sliding analysis of earth structures". *Journal of Geotechnical and Geoenvironmental Engineering*, 126 (11), 1002-1014.
- Wartman, J., Seed, R.B., and Bray, J.D. (2005). "Shaking table modeling of seismically induced deformations in slopes". *Journal of Geotechnical and Geoenvironmental Engineering*, 131 (5), 610-622.
- Wilson, D.W. (1998) "Soil-pile superstructure interaction in liquefying sand and soft clay". PhD Thesis, Dept.Civ.Env.Engrg., University of California at Davis, California.